


HTC – 940 Slim Lane

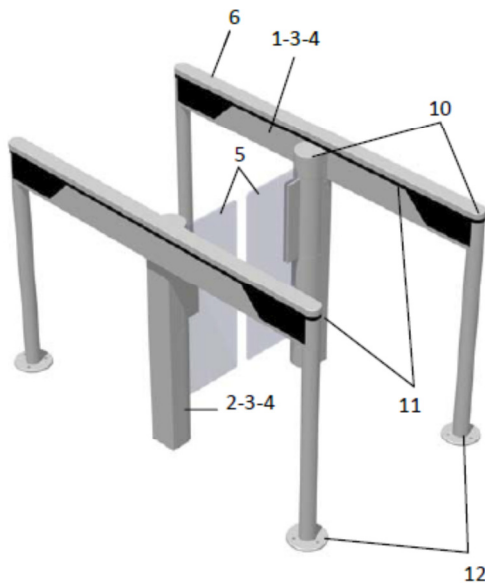

The HTC 940 double swing door security entrance lane offers a high bidirectional throughput and uncompromising security.

With its transparent, elegant design and minimal footprint, the 940 is designed to integrate perfectly into any architectural style.

Equipped with high processing capacity and an exclusive detection system, it guarantees accurate user tracking and prevents any unauthorised use.

The 940 is a modular product that can be installed as a single or a multi-lane array and can also be combined with the a wide lane model.

Description

1. Handrail frame: steel beam with RoHS anti-corrosion zinc plating treatment and stainless steel posts. The handrail includes photoelectric cells for user detection and the logic control board.
2. Self-supporting kinematic steel frame with RoHS anti-corrosion zinc plating treatment. The frame contains the electromechanical drive assembly for the swinging obstacle and the electronic control boards.
3. Brushed #4 AISI 304L stainless steel housing.

4. Brushed #4 AISI 304L stainless steel panels fastened to the frame for access to the internal components.

5. Clear, 10 mm thick tempered monolithic glass obstacles, swinging in the direction of user passage.

6. Brushed #4 AISI 304L stainless steel top cover.

7. Electromechanical drive units each consisting of:

- A DC permanent magnet motor with epicyclic gearbox.
- A controller providing progressive accelerations and decelerations of the obstacle, for smooth movement and enhanced user safety.
- A geared electromagnetic brake for locking of obstacles in the event of forced entry attempts.
- A sensor controlling the obstacle position.

SECURI-SAFE standard operating mode:

electromechanical lock of the obstacles in case of forced entry attempt in any passage directions.

8. AS1167 logic control board, equipped with ARM technology and the Linux operating system, ensuring advanced traffic management. An embedded Web server, accessible by a simple web browser, offering an interface for the configuration of functional gate parameters as well as a complete diagnostic and maintenance tool.

9. Transfer of information through an Ethernet interface, USB and dry contacts: passage authorisation, passage information, reader locking, fraud, equipment failure.

10. Orientation and function pictograms indicating gate and passage status to the user.

11. Proprietary DIRAS detection system, consisting of a high-density matrix of infrared transmitter/receiver photocells beams. It follows users progression through the gate as well as ensuring their safety during opening/closing of the obstacles.

12. Finishing plate for post.

HTC – 940 Slim Lane

STANDARD TECHNICAL CHARACTERISTICS

(per lane)

Electrical supply	Single phase 110-240 VAC (+/-10%) - 5A - 50/60 Hz + Ground
Power consumption	Standby: 50 W Cycle: 170 W Maximum: 300 W
Motors (x2)	24 VDC – nominal output power 93 W
Passageway (L)	600 mm 575 mm < L < 650 mm (min/max)
Min opening or closing times	0.7 s (Depending on the access control system reactivity and the speed of users)
Ambient operating T°	0 to +50°C
Ambient relative humidity in operation	< 95%, no condensation
MCBF	2,500,000 mean cycles between failures, with recommended maintenance.
Sound level	55 dB
Weight	62 kg (per left/right unit) 91 kg (per intermediate unit)
IP	40
CE	Conforms to European standards

PRECAUTIONS FOR USE

- For security reasons, children (user smaller than 1 m tall) must be supervised by an adult at all times when in the vicinity of the unit and during passage through the lane
- A child must absolutely precede the accompanying adult when lane passage is required
- If habitual use by children is anticipated, we recommend the addition of all options required to optimize the level of protection.

Work to be undertaken by customer –

- a) Mains supply, cable to be long enough to be connected to the head of the unit. Entered from underneath.
- b) Cabling for the required access control.
- c) Required civil construction work, upon an order being placed a site specific drawing will be issued.

Optional extras –

- Heights 1200mm, 1500mm and 1700mm
- Support posts for readers and push buttons.
- Push button consoles for behind reception areas.
- IP Monitoring panel, requires IP connection but enables you to see the position of the lanes and also any errors/alarms.
- Battery back-up to automatically open in case of a power failure.
- Free opening on exit cells.
- Personalized company logo on the leafs, artwork has to be supplied for us to design.
- Additional safety features for protection for people carrying luggage.
- Fixing frame to be concreted into the floor or designed to be clamped.

